RANGE COMPOSITION

N 900: a range of over 150 models for the professional caterer designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected in the total modularity of the range that ensures innumerable configurations, either free-standing, bridged or cantilever. N900 demonstrates how advanced technology can satisfy the needs of the professional caterer.
The models detailed on this sheet are 2 free-standing rectangular boiling pans with indirect heating (jacketed): 2 gas and 1 electric.

Model 200283

N 900

RECTANGULAR BOILING PANS

ZANUSSI PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

◆ Burners in stainless steel with optimized combustion, flame failure device and protected pilot light (gas models).
◆ Incoloy armoured elements endowed with safety thermostat positioned in the jacket cavity base (electric models).
◆ Safety thermostat.
◆ Great reduction of energy consumption thanks to a pressure switch controls monitoring energy and water consumption simplifiing use and eliminating the need for continuous water refilling.
◆ Front and side panels in stainless steel with Scotch Brite finish.
◆ All models have right-angled side edges to allow flush-fitting joins between units, eliminating gaps and possible dirt traps.
◆ Main connections can be via the base of the unit.
◆ All models provided with service duct to facilitate installation.
◆ Feet in stainless steel 50 mm adjustables in height.
◆ All gas appliances are supplied for use with natural gas, with LPG conversion jets supplied as standard.
◆ Hot and cold water refilling through an electrovalve.Water drain through a 2" stainless steel tap with athermic handle.
◆ The special design of the control knob system guarantees against water infiltration.
◆ All models incorporate fixing points for the bridging system
◆ IPX5 water protection.

* In accordance with CE regulations for gas models belonging to class B11 (power over 14kW), it is necessary to install a chimney (if installed under a hood) or chimney and draft diverter if the waste gases are vented directly outside.

TECHNICAL DATA			
CHARACTERISTICS	**MODELS**		
	NPGI918 200282	**NPGI1225 200283**	**NPEI1225 200284**
Power supply	Gas	Gas	Electric
External dimensions - mm			
width	900	1200	1200
depth	900	900	900
height	850	850	850
height adjustment	50	50	50
Net vessel useful capacity - Lt.	180	240	240
Vessel dimensions - mm			
height	485	485	485
width	740	1040	1040
depth	550	550	550
Heating type	Indirect	Indirect	Indirect
Power - kW			
gas	29	35	
installed-electric	0.05	0.05	24
Net weight - kg.	180	222	200
Supply voltage	230 V, 1N, 50/60	400 V, 3N, 50/60	400 V, 3N, 50/60
INCLUDED ACCESSORIES			
WATER ADDITIVE AGAINST CORROSION	1	1	1

200282

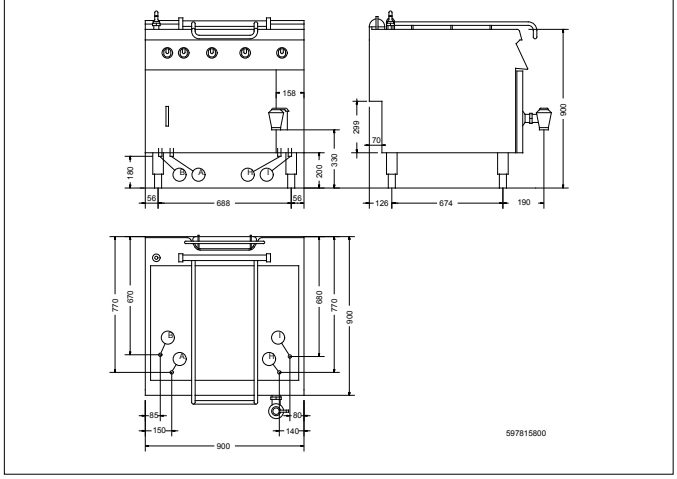

200283

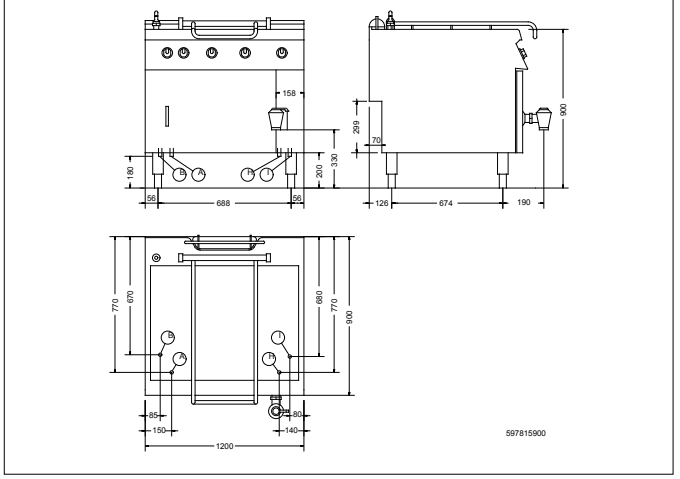

200284

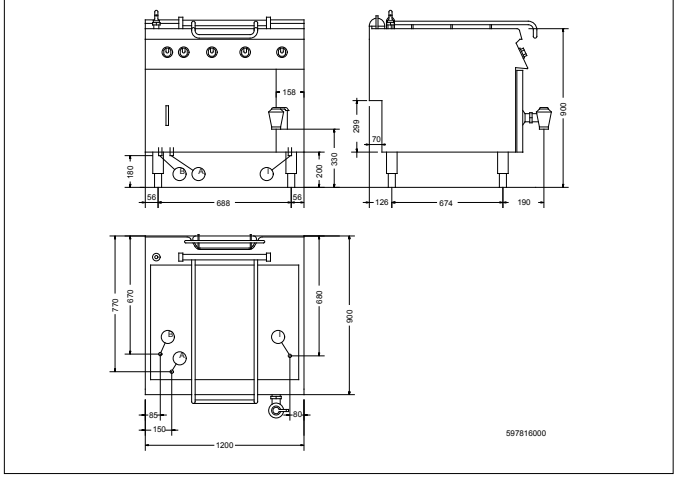

LEGEND	NPGI918 200282	NPGI1225 200283	NPEI1225 200284
A - Hot water inlet	1/2"	1/2"	1/2"
B - Cold water inlet	1/2"	1/2"	1/2"
C - Water drain	1/2"	1/2"	1/2"
G - Condensation outlet	2"	2"	2"
H - Gas connection	3/4"	3/4"	
I - Electrical connection	230 V, 1N, 50/60	400 V, 3N, 50/60	400 V, 3N, 50/60

OPTIONAL ACCESSORIES			
ACCESSORIES	MODELS		
	NPGI918 200282	NPGI1225 200283	NPEI1225 200284
2 SIDE COVERING PANELS FOR TOP-D=900MM	206278	206278	206278
2 SIDE COVERING PANELS H=700 D=900	206134	206134	206134
2 SIDE KICKING STRIPS	206180	206180	206180
4 FEET FOR CONCRETE INSTALLATION	206210	206210	206210
4 WHEELS (2 WITH BRAKE)	206188	206188	206188
FRONT.KICK.STRIP F.CONCRETE INST.1000 MM	206150	206150	206150
FRONT.KICK.STRIP F.CONCRETE INST.1200 MM	206151	206151	206151
FRONT.KICK.STRIP F.CONCRETE INST.1600 MM	206152	206152	206152
FRONT.KICK.STRIP F.CONCRETE INST.200 MM	206146	206146	206146
FRONT.KICK.STRIP F.CONCRETE INST.400 MM	206147	206147	206147
FRONT.KICK.STRIP F.CONCRETE INST.800 MM	206148	206148	206148
FRONTAL KICKING STRIP 1000 MM	206177	206177	206177
FRONTAL KICKING STRIP 1200 MM	206178	206178	206178
FRONTAL KICKING STRIP 1600 MM	206179	206179	206179
FRONTAL KICKING STRIP 200 MM	206174	206174	206174
FRONTAL KICKING STRIP 400 MM	206175	206175	206175
FRONTAL KICKING STRIP 800 MM	206176	206176	206176
JUNCTION SEALING KIT	206086	206086	206086
PAIR OF COVERING STRIPS FOR END ELEMENTS	206234	206234	206234
PRESSURE REGULATOR FOR GAS UNITS	927225	927225	
SIDE HANDRAIL-RIGHT/LEFT HAND	206165	206165	206165
SUPPORT FOR "BRIDGE" SYSTEM 1000 MM	206138	206138	206138
SUPPORT FOR "BRIDGE" SYSTEM 1200 MM	206139	206139	206139
SUPPORT FOR "BRIDGE" SYSTEM 1400 MM	206140	206140	206140
SUPPORT FOR "BRIDGE" SYSTEM 1600 MM	206141	206141	206141
SUPPORT FOR "BRIDGE" SYSTEM 400 MM	206154	206154	206154
SUPPORT FOR "BRIDGE" SYSTEM 800 MM	206137	206137	206137
WATER ADDITIVE AGAINST CORROSION	927222	927222	927222

ISO 14001

ZANUSSI PROFESSIONAL

www.zanussiprofessional.com

The Company reserves the right to alter technical specifications without prior notice.